

FLY LIGHT

Individual work platform rails 360°.

Complies with the new european standard EN 131-7 of stairs that offer 360° protection and an evolutionary stabilizer system that can be adjusted according to the space in which the operator must work. Equipped with square 30x30 mm steps in rising ramp. Steps with inclination of 30° so that they are parallel to the ground, allowing the operator to have a flat bottom foot increasing the convenience and productivity.




TECHNICAL

- Enhanced aluminum-slip tray (58x44 cm) with accidental anti-opening and bottom 10 cm;
- Supporting clubs in PVC ergonomic non-slip;
- Non-slip steps: 30 mm (depth) and 30 cm distance between steps;
- Guard rails 100 cm in four sides;
- Closed folding telescopic stabilizers 64 cm
 Deg 3/4: Running = 144 cm
 Deg 5/6: Running = 168 cm
 Deg 7: Running = 202 cm;
- Anti-opening strap (enclosed stairway);
- Closed the ladder remains standing (63 cm of thickness);
- Capacity: 150 kg.



EQUIPMENT

- Handrails adjustable and removable;
- Transport wheels diameter: 150 mm;
- Rising ramp: 47 cm;
- Tool holder exchange;
- Steel hinges;
- Packaged in plastic;
- Retractable term;
- Painted steel joint.

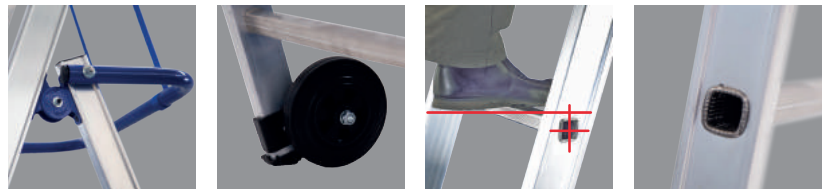

REF							KG	€
	m	m	m	m	m			
10855	3	1.87	0.72	2.72	0.64x1.18	0.63	21.00	
10856	4	2.17	1.00	3.00	0.64x1.50	0.63	22.00	
10857	5	2.47	1.28	3.28	0.64x1.72	0.63	23.00	
10858	6	2.77	1.56	3.56	0.64x1.72	0.63	24.00	
10859	7	3.07	1.84	3.84	0.64x1.72	0.63	25.00	

