

APROF

Warehouse ladder rung 10 cm wide and work platform

Warehouse step ladder specially designed for workers who want to stay at a time over an extended period of time (warehouses, cemeteries, maintenance, department stores...). It is made of ribbed aluminum which provides maximum strength. Steps soldiers to amounts that create a sturdy structure. Very convenient for its wide rise, deep steps and wide platform that includes a footer with a height of 15 cm, handrails and guardrails 1 m in height which offers a lot of security. They include special wheels and handles for easy transport. The ladder closes, facilitating storage. Optionally one can adapt a particular stabilizer for narrow passages 75 cm for areas with little space.


PROTECTION & SAFETY
360°

STEP LADDERS



TECHNICAL

- Number of steps: 4-14;
- Distance between steps: 24 cm;
- Depth steps: 10 cm;
- Profile amounts: 100x30 mm;
- Rising width: 60 cm;
- Platform dimensions: 54x54cm;
- Guard rails height: 1 m;
- Footer height: 15 cm;
- Wheels of 125 mm in diameter;
- Platform height: from 1,07 to 3,75 m;
- Total height of the ladder: from 2,07 to 4,75 m;
- Capacity: 150 kg.

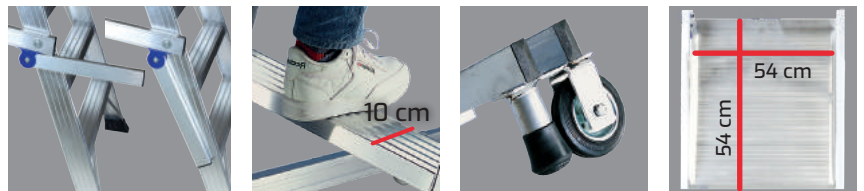

EQUIPMENT

- Handrails rise;
- Steps non-slip;
- Security bar anti-opening/accidental closure which also acts as a handle for transportation;
- Non-slip rubber plates with ergonomic design;
- Tool holder tray for up to 15 kg;
- Reinforcements anti-flexion in larger steps;
- Use and maintenance manual;
- Certificate of conformity with standard EN 131;
- Identification label.

OPTIONS

- Stabilizer 75 cm for narrow passages;
- Kit 4-wheel limited slip 80 mm in diameter;
- Other measures on request.

| REF | | | | | | | KG | € |
|-------|----|------|------|------|------|------|-------|---|
| | m | m | m | m | m | m | | |
| 10051 | 4 | 1.07 | 2.07 | 3.07 | 1.01 | 1.32 | 27.00 | |
| 10052 | 6 | 1.60 | 2.60 | 3.60 | 1.01 | 1.60 | 31.00 | |
| 10053 | 8 | 2.15 | 3.15 | 4.15 | 1.17 | 1.92 | 35.00 | |
| 10054 | 10 | 2.65 | 3.65 | 4.65 | 1.17 | 2.22 | 39.00 | |
| 10055 | 12 | 3.16 | 4.16 | 5.16 | 1.33 | 2.50 | 44.00 | |
| 10056 | 14 | 3.75 | 4.75 | 5.75 | 1.50 | 2.80 | 48.00 | |

